

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 146 548 A1

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
17.10.2001 Bulletin 2001/42

(21) Application number: 99972368.7

(22) Date of filing: 17.11.1999

(51) Int Cl.7: H01L 21/00, H01L 21/68

(86) International application number:
PCT/JP99/06408

(87) International publication number:
WO 00/30156 (25.05.2000 Gazette 2000/21)

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

(30) Priority: 17.11.1998 JP 34359698
25.12.1998 JP 36913898

(71) Applicant: TOKYO ELECTRON LIMITED
Minato-ku, Tokyo 107-8481 (JP)

(72) Inventors:
• OZAWA, Jun
Nakakoma-gun, Yamanashi 400-0113 (JP)

• HIROSE, Jun
Nakakoma-gun Yamanashi 409-3865 (JP)
• NARUSHIMA, Masaki;
Higashiyatsushiro, Yamanashi 406-0853 (JP)

(74) Representative: HOFFMANN - EITLE
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **VACUUM PROCESSING SYSTEM**

(57) A vacuum process system comprises: a load port on which an object to be processed is set; a common transfer chamber disposed adjacent to the load port, having an internal space set at an atmospheric pressure level, and including a first transfer device that is movable and transfers the object into/from the load port, the first transfer device being disposed within the internal space; and a process unit having one process chamber for subjecting the object to a predetermined process, and a vacuum transfer chamber connected to the process chamber, having an internal space set at a vacuum pressure level, and including a second transfer device for transferring the object into/from the process chamber, the second transfer device being disposed within the internal space. The process units are individually connected to the common transfer chamber such that the process units are substantially parallel to each other. The vacuum chamber of each process unit is connected to the common transfer chamber. The process unit extends linearly in a direction substantially perpendicular to the common transfer chamber. The object is transferred into/from the vacuum transfer chamber by means of the first transfer device.

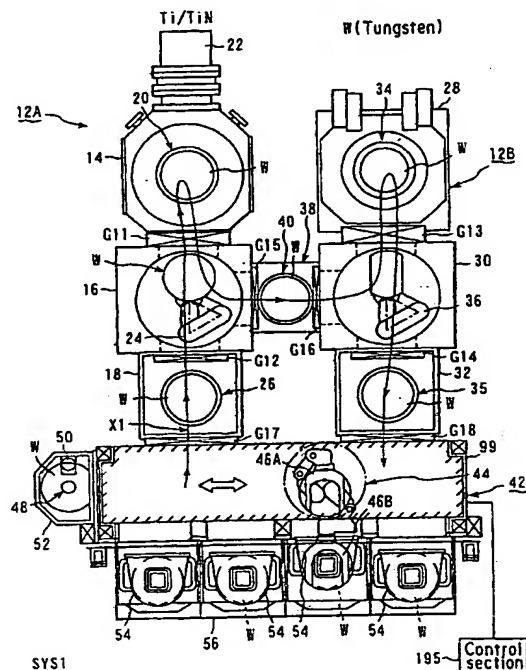


FIG. 1

EP 1 146 548 A1